



ORKNEY FASTLINER 19 **NEW**


ORKNEY
BUILT TO LAST

The New Fastliner 19 is an ideal harbour launch for the family as well as being designed to run offshore. This easily driven hull ensures good performance and economy with modest sized outboards. The first choice for keen fisherman who benefit from the large open plan cockpit and tiller steer option. Drifting comfortably and lying well at anchor.

Like her smaller sister the Longliner 16, she offers the choice of different seating configurations tailored to your exact requirements. As standard the Fastliner 19 has a spacious 'self draining' open plan cockpit with an option for a Folding spray dodger or GRP cuddy, along with either a centre or side mounted steering console.

SPECIFICATION & CONSTRUCTION

Standard boat in hand laid laminated GRP. Isophthalic resin is used in the hull which is stiffened below the waterline with a GRP girder system. The main under floor areas are foam filled and the hull and deck are bonded resulting in a high strength to weight ratio structure. The cockpit is self-draining with a 28" interior freeboard. Built in buoyancy is incorporated beneath forward and aft seating. An anchor well is forward with storage under and a moulded aft thwart with fuel tank and battery storage underneath is standard. Hardware includes anodised alloy bow and stern mooring cleats, bow roller and a stainless steel winch eye. A heavy duty all round PVC fender is fitted with stainless steel end caps. Fitted manual bilge pump.

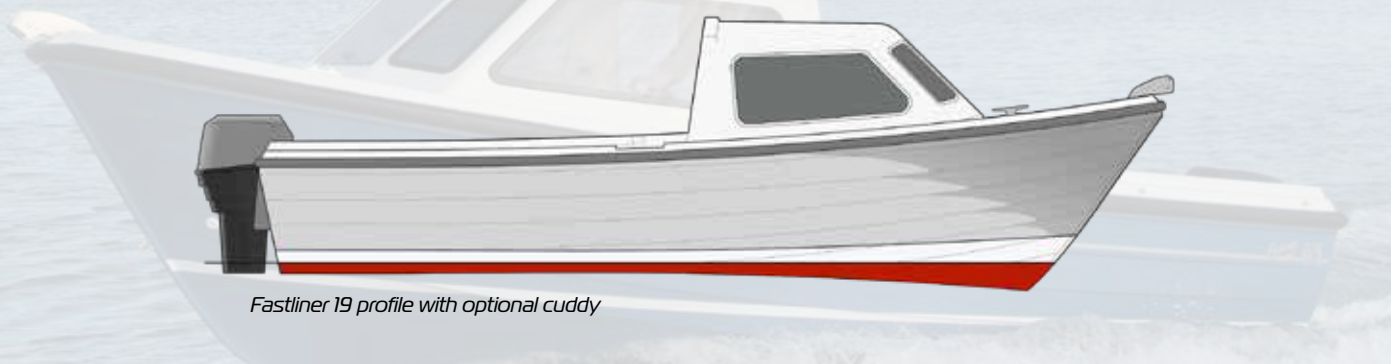

Fastliner 19 profile with optional cuddy



Fastliner 19 plan with optional cuddy



Fastliner 19 plan standard layout

Photographs feature Series 2 592

SPECIFICATIONS

LOA	19'5"	5.92m
Beam	7'5"	2.26m
Max HP	Maximum 80 hp Long shaft outboard 60hp Tiller steer version	
Design Speed	Max design speed 27 knots Optimum design speed 18 knots	
Performance Indicator	30 hp	12 knots
	60 hp	23 knots
	80 hp	27 knots

KEY POINTS

- Easily adaptable layout including centre & side mounted console options
- Spacious open plan self-draining cockpit as standard
- 28" interior freeboard makes a safe and secure cockpit
- 27 knot performance
- Economical to run
- Tiller and remote steer options

